

Programmes/functions
- Steaming 35 °C-100 °C
- Re-heating
- Multi level cooking option
- 40 automatic programmes

Special features
- Water tank empty indicator
- Water tank capacity 1.3 litre
- Electronic control
- Illuminated function display
- Silver Temperature display
- Heating up indicator
- Residual heat indicator
- Temperature proposal, Heating up indicator, Actual temperature display
- Safety switch off

Features
- Permanent control panel lock
- Control panel lock
- Silver display EasyClock
- Automatic on/off programmer
- Interior halogen light
- Interior light
- 4 shelf positions
- Framed glass inner door
- Triple glazed door
- Heat reflective glass
- Stainless steel interior
- Cleaning programme
  De-scaling programme

Design
- Bevelled glass fascia
- Symmetrical design
- Central oval bevelled control
- Retractable controls
- 'U-form' door design
- Straight bar handle
- Bevelled bar handle

Performance/technical information
- 35 litre capacity
- Energy efficiency rating A -20%

Standard accessories
- 1 large perforated deep stainless steel tray
- 1 small perforated deep stainless steel tray
-
- 1 large solid stainless steel tray
- 1 small solid deep stainless steel tray
- 1 flat wire shelf

Optional accessories
- ⅓ GN Ceramic dish, 38mm deep Z1665X0
- ⅔ GN Ceramic dish, 38mm deep Z1685X0

Series 3
C47C22N3GB
CircoSteam combination oven
Stainless steel

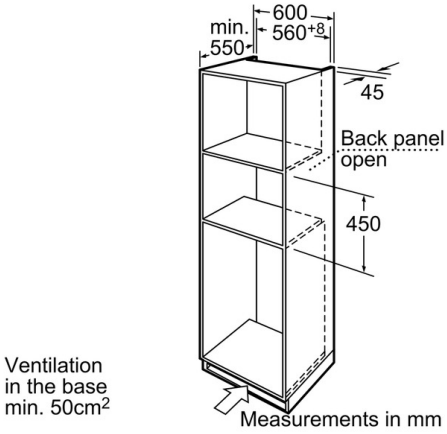

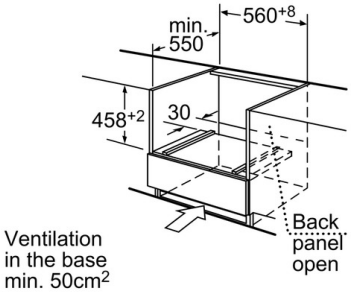

Measurements in mm

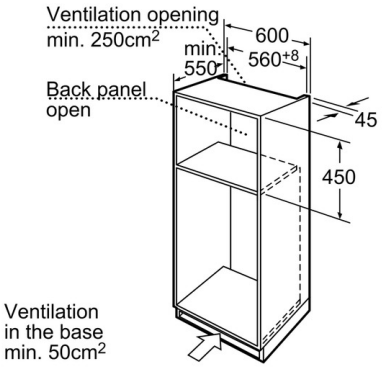

Measurements in mm

Characteristics
Color / Material Front : Stainless steel
Built-in / Free-standing : Built-in
Door opening : Drop down
Required niche size for installation (HxWxD) : 450 x 560 x 550
Dimensions of the product (mm) : 454 x 595 x 550
Control Panel Material : stainless steel + glass insert
Door Material : Glass
Net weight (kg) : 26.0
Approval certificates : CE, VDE
Length of electrical supply cord (cm) : 130

Consumption and connection features
Current (A) : 10
Voltage (V) : 220-240
Frequency (Hz) : 50
Plug type : GB plug
Approval certificates : CE, VDE
Number of cavities (2010/30/EC) : 1
: 35
Energy efficiency class (2010/30/EC) : A
Energy consumption per cycle forced air convection (2010/30/EC) : 0.67
Energy efficiency index (2010/30/EC) : 95.7

2015-03-27

Alternative colors available

C47C22N3GB:Stainless steel

Included accessories

1 x STS tray-GN1/3-punched-40 mm deep
1 x STS tray-GN1/3-unpunched-40 mm deep
1 x STS tray-GN2/3-punched-40 mm deep
1 x STS tray-GN2/3-unpunched-28 mm deep
1 x grid

EAN code

4242004160045

Series 3
Technical Data 1

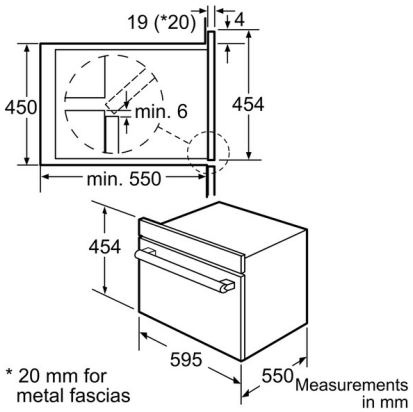

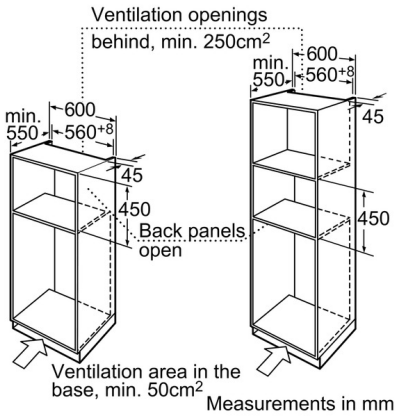

Series 3
Technical Data 2